


# Controller 2500/Monitor 1500



- **Computerize your sprayer with 3 clicks...**

## **HARDI Controller 2500 or Monitor 1500 is the answer**

if you need basic electronics for your sprayer. Three clicks from 3 plugs, speed, flow and power, get you spraying.

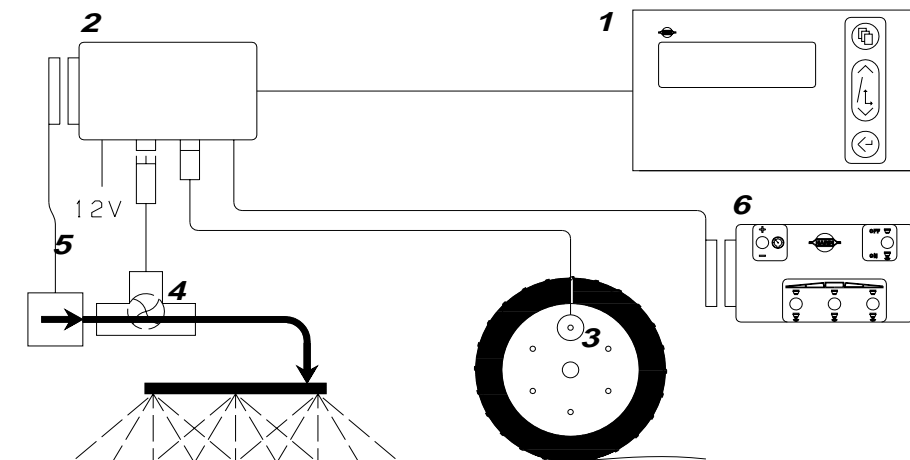

	Controller 2500	Monitor 1500 + active boom width	Monitor 1500
--	--------------------	--	-----------------

1. Display	•	•	•
2. Scanbox (junction box)	•	•	•
3. Speed transducer at wheel	•	•	•
4. Flow transducer	•	•	•
5. Electric control unit	•		
6. Control box	•	•	

- **Quick to connect.** Only a few seconds are needed to connect the plugs.
- **Easy to use.** The readout has the help you need in every day use.
- **Simple to use.** Only 4 keys for all functions.
- **Big two-line readout.** Up to 3 lots of information shown simultaneously.
- **Display back-light** for night time spraying.
- **Audio / visual alarms** for volume rate and tank contents to warn of discrepancies.
- **Simple to fit.** Can connect directly into existing electric control unit.
- **No batteries.** The non-volatile memory simplifies storage.

## **HARDI Controller 2500**

Permits automatic control of volume rate. This allows you to concentrate on driving as the rate is automatically maintained by HC 2500. Press the “up” arrow to increase the volume rate. Easy, quick and simple.

## **HARDI Monitor 1500**

Monitors the volume rate. When used with the control unit switch box, correct area with closure of up to 8 spray boom sections is possible.

### **Display**

The compact display measures only 20 x 13 x 3 cm and is easy to mount with the supplied bracket.

The matrix readout has two lines so two lots of information can be shown at the same time. Readout includes:

- Volume rate applied.
- Speed.
- Programmed and actual volume rate.
- Tank contents.
- Liquid rate per minute.
- Active boom width.
- Optional transducer readout.
- Revolutions.
- One trip teller totalling covered area and volume sprayed.
- Eight trip tellers for individual area covered and volume sprayed.

### **Options**

- Revolutions transducer.
- Area meter transducer.
- 4-20 mA transducer (e.g. pressure).
- Switch box for manual control unit.

**HARDI INTERNATIONAL A/S**  
 HELGESHØJ ALLE 38 • DK 2630 TAASTRUP • DENMARK  
 E-Mail: hardi@hardi-international.com • www.hardi-international.com