




The successor to the Webb drills, the Seven is a dependable, robust and simple machine to operate. A 28 speed chain and sprocket drive landwheel shared with the Star and ProAir machines provides the positive drive. The single sided chassis is the same as used on the Star machine with easy depth adjustment.

Key Features

- 1 Tough single sided chassis design
- 2 Floating parallel linkage for consistent depth control
- 3 Easy depth control via rear wheel quadrant in 2.5mm steps
- 4 Adjustable rear wheel pressure via spring
- 5 Single sided mechanical drive
- 6 12 litre seed hopper

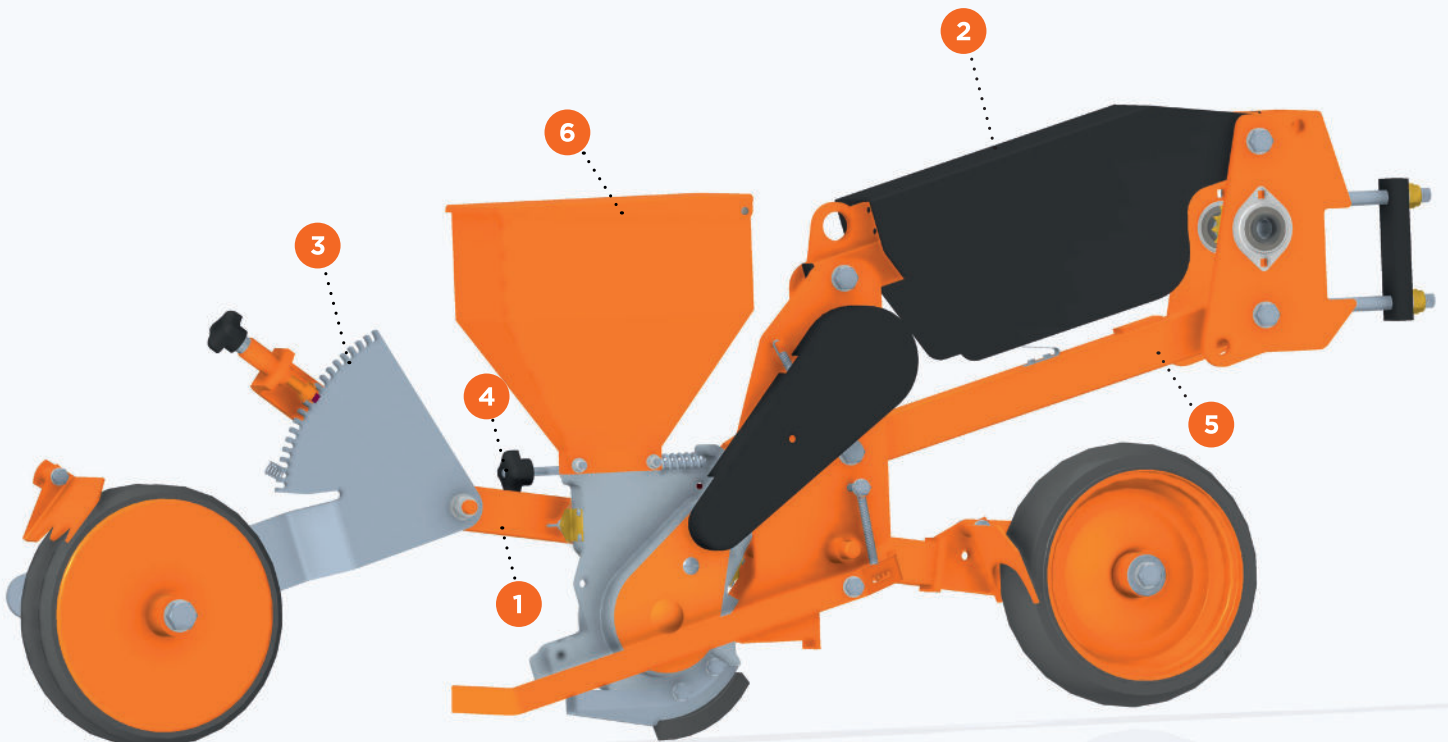

Cell Wheel Drills

With regular shaped or pelleted seed, the Stanhay cell wheel metering unit is unmatched and with the correct setup offers near perfect single line performance. With few moving parts running costs are low and maintenance simple. Originally developed for pelleted Sugar Beet in the UK the system is just as effective with a range of other pelleted seeds such as lettuce.

Seed falls from the hopper into a selection chamber which is positioned vertically above the cell wheel, here the seeds fill the individual cells while the cell wheel and deflector wheels rotate anticlockwise. The deflector wheel gently rolls excess seed away from the wheel to ensure only one seed per cell. The seed ejection point is at the bottom of the unit close to the ground where a special ejector plate ensures precise consistent ejection of seed to maintain accurate seed spacing.



The metering unit is available in one chassis with two different drive options, mechanical and electric drive.



Seven Data Table

PLANTER TYPE	SEED TYPE	MULTILINE CAPABILITY	HOPPER CAPACITY (LITRES)	TOOLBAR	MINIMUM SEED SPACING	MIN/MAX SEED SIZE	MIN/MAX NUMBER OF ROWS PER MACHINE	MINIMUM ROW SPACING	MINIMUM LINE SPACING	APPROX ROW UNIT WEIGHT (KG)
CELL WHEEL	REGULAR SHAPED OR PELLETTED	SINGLE LINE	12	100MM OR 180MM SQUARE	30MM	1MM/10MM	2-18+	250MM	N/A	58
ROW UNIT LENGTH (MM)	DEPTH CONTROL	COVERER OPTIONS	WHEEL OPTIONS	SEED PRESS WHEELS AVAILABLE	ROW UNIT DOWN FORCE ADJUSTMENT	REAR WHEEL DOWN FORCE ADJUSTMENT	DRIVE SYSTEM	TRACTOR REQUIREMENT	LINKAGE CATEGORY	
1400	INCREMENTAL 2.5MM STEPS	ARM	STAINLESS / CAGE / RUBBER	YES	YES	YES	12 SPEED CHAIN DRIVE	SMALL OR LARGE TRACTOR	CAT 2	